

KRUPINSKI CRANES

KR 15 RAPID

KR Drives[®]



37 kWh / (100↻)



91 dB
A_{BCD}



+25

Fast-erecting crane

Schnelleinsatzkrane/Żuraw szybkomontujący

KR 15 RAPID



Technical data:

Technische daten:

Dane techniczne:

Max. capacity 1.5 t

Max. Traglast/Maks. udźwig

Max. jib-length 20 m

Max. Ausladung
Maks. wysięg

Erection and transport

Aufstellvorgang und Transport/Montaż i transport

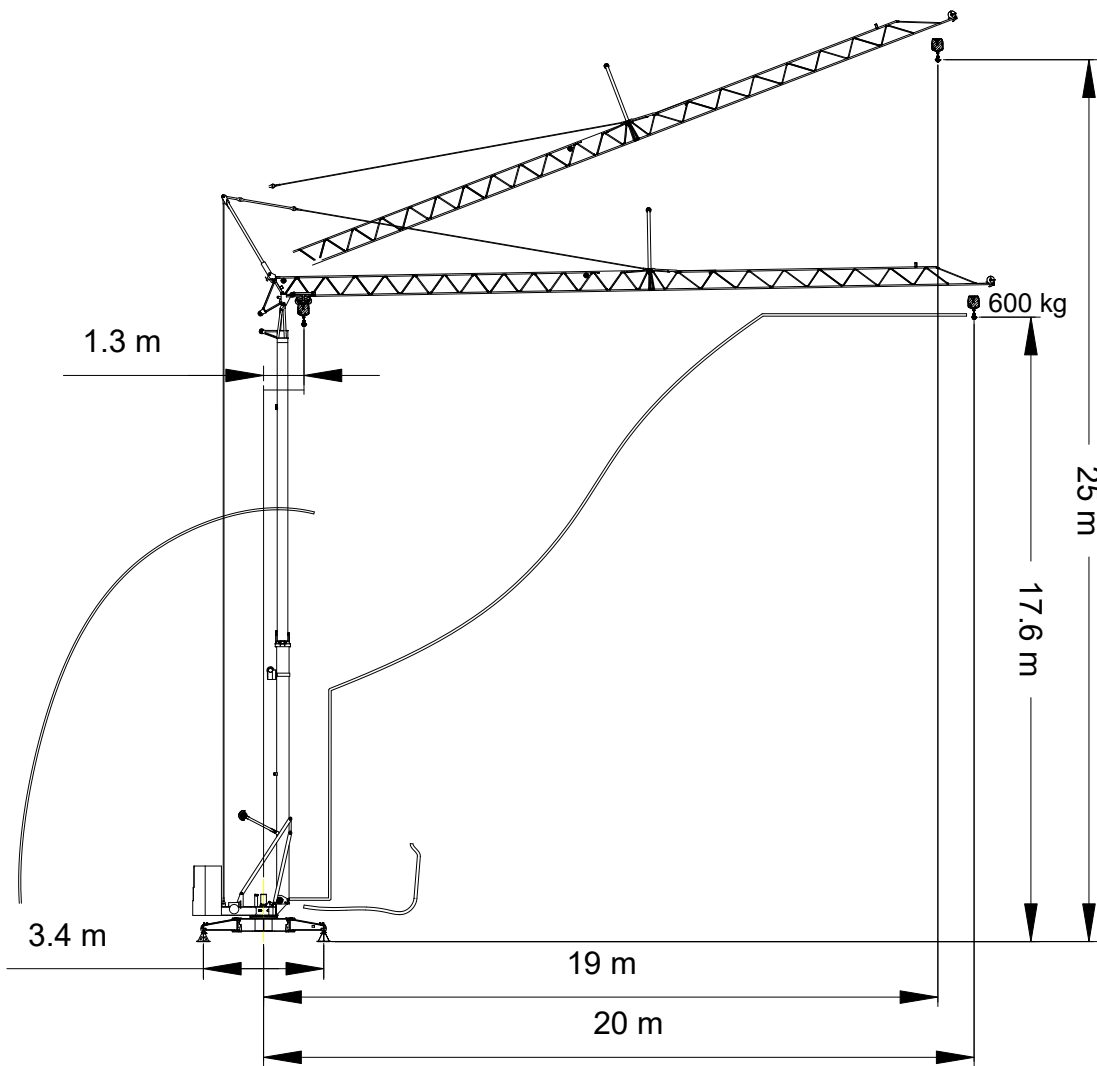
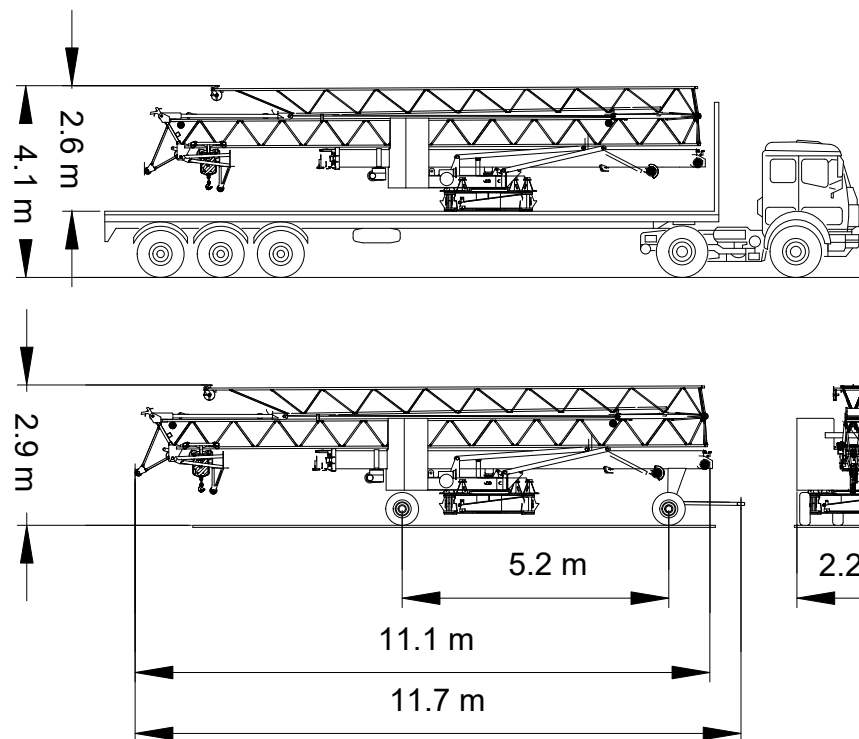


Table of capacity

Traglastabelle/Tabela udźwignów




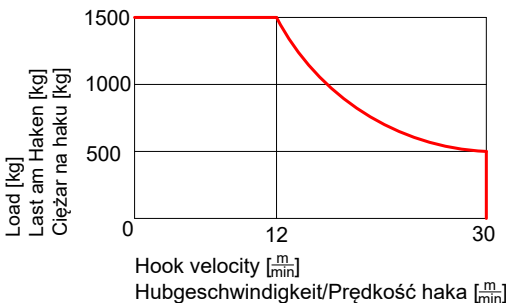

[m]	1500 [kg]	9	12.5	16	17	20
20.0	1.3 - 9.0	1500	1020	756	702	600

[m]	600 [kg]	9	12.5	16	17	19
19.0	1.3 - 19.0	600	600	600	600	600



Data of drives















Antriebe/Dane napędów

	$V \rightarrow 0 - 30 \frac{m}{min}$	1.5 kW	400 V 50 Hz
	$V \rightarrow 0 - 1.0 \frac{1}{min}$	1.5 kW	3 Ph
		HH max. for winch type: Max. HH für: HH maks. dla wciągarki typu:	
		Standard = 25 m	
Type Art/Type FU/H 4.4 4.4 kW	 <p> Load [kg] Last am Haken [kg] Ciężar na haku [kg] </p> <p> Hook velocity [$\frac{m}{min}$] Hubgeschwindigkeit/Prędkość haka [$\frac{m}{min}$] </p>	 1.5 t	Supply voltage Versorgungsspannung AC Napięcie zasilania 400 V / 230 V
			Max motor output Antriebsleistung gesamt Suma mocy silników ~7.4 kW
			Connected power Anschlussleistung Moc przyłączeniowa 8.9 kVA

 All data refer to standard EN 14439
 Nach Norm EN 14439
 Zgodnie z normą PN-EN 14439

Packing list

Kolli-Liste/Lista elementów

Item Pos. Lp.	Qty. Anz. Ilość	Element Teil Element			left / links / lewy right / rechts / prawy	L [m]	B [m]	H [m]	Weight* Gewicht* Waga* [kg]
1	4	Ballast Ballast Balast			left / links / lewy right / rechts / prawy	0.78	0.87	0.90	4x1100
2	1	Ballast base Ballastbasis Podstawa balastu				2.20	1.40	0.47	1807
3	1	Road transport axle front Transportachse vorne Oś przednia				7.88	2.58	3.87	216
4	1	Road transport axle behind Transportachse hinten Oś tylna				6.66	6.67	3.15	485
5	4	Pyramidal support Stützpyramide Podpora				0.38	0.33	0.27	4x15
6	1	KR 15 RAPID folded KR 15 RAPID gefalteter KR 15 RAPID złożony				11.44	1.83	2.57	4300

 *Mounting weights see: Manual instruction
 *Montagegewichte siehe Betriebsanleitung
 *Ciężary montażowe patrz: Instrukcja Obsługi

www.krupinskicranes.com



Subject to alterations! This information is supplied without liability.
Sämtliche Angaben erfolgen ohne Gewähr. Änderungen vorbehalten!
Producent zastrzega sobie prawo do wprowadzania zmian.

PN-EN 14439 | C.0.10.0012 (BGL) | A3 (FEM 1.001) | HD4 HC1 (PN-EN 13001-2)